

12W Wall Mount Switching Power Supplies For Medical Equipment

Description:

The MPU12B series of AC/DC switching mode power supplies provide 12 watts of continuous output power. This series is suitable for use in Blood Pressure measurements, Frequency Therapy Device and Dental Curing light applications. All models are designed to comply with TUV/T-mark (EN 60601-1:2nd Edition) and new CE requirements.

Features:

- Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- 3 Prong Plug-In Mains Connector
- Optional Output Connector (See appendix)
- Single Output
- Class II
- Over Voltage and Over Load protection.
- Over temperature Detection
- Energy Star 2.0, Efficiency level V
- 3 year warranty



Safety Approvals:



Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Safety Approvals Input Voltage Range		100		240	VAC
	Operate Voltage Range		90		264	VAC
fin	Input Frequency		47		63	Hz
Po	Output Power Range	Vin=90 to 264VAC	0		12	W
Vo	Output Voltage Range		See rating chart			V
Io	Output Current Range		See rating chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC		0.25	0.35	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC		0.17	0.22	A
Irl	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		14	25	A
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC		28	50	A
Eff	Efficiency	Io=Full Load, Vin=230VAC	73.3	77.7	85	%
REG-i	Line Regulation	Io=Full Load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC		3	5	%
OVP	Over Voltage Protection		112		132	%
OCV	Over Current Protection		110		150	%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC			4	mS
Thold	Hold-Up Time	Io=Full Load, Vin=110VAC	12	16		mS
Ts	Start Up Time	Io=Full Load, Vin=100VAC	0.3	1	2	S
Vp-p	Ripple & Noise(Peak to Peak)	Full Load, Vin=90VAC		0.5	1	%
Ilk	Safety Ground Leakage Current	Io=Full Load, Vin=240VAC			0.1	mA
TC	Temperature Coefficient	All output	-0.04		0.04	%/°C
Pno	No-Load Power Consumption	No load, Vin=240VAC			0.3	W
Tjsd	Thermal Shutdown ① by Junction Temperature Controller	The parameter is not subject to production test-verified by design/characterization of integrated controller.	-25		130	°C

① As long as faulty conditions have been removed, the adaptor will automatically power up as usual.

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		0	50	70	°C
Tstg	Storage Temperature		-40		85	°C
Ho	Operating Humidity		0		95	%
Hr	Storage Humidity		0		75	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1M			Hrs
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C					

12W Wall Mount Switching Power Supplies For Medical Equipment

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	5656			VDC
EN55022	Meet EMI requirements: EN55022	Vin=230VAC, 50Hz	B			CLASS


Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total Regulation [Ⓢ]	Maximum Output Power
MPU12B-102	5 ~ 6 VDC	2.00 ~ 1.66 A	5%	10W
MPU12B-103	6 ~ 8 VDC	2.00 ~ 1.50 A	5%	12W
MPU12B-104	8 ~ 11 VDC	1.50 ~ 1.09 A	5%	12W
MPU12B-105	11 ~ 13 VDC	1.09 ~ 0.92 A	5%	12W
MPU12B-106	13 ~ 16 VDC	0.92 ~ 0.75 A	5%	12W
MPU12B-107	16 ~ 21 VDC	0.75 ~ 0.57 A	3%	12W
MPU12B-108	21 ~ 27 VDC	0.57 ~ 0.44 A	3%	12W

- Ⓢ MPU12B-102~103 are required to use AWG#18 / 6FT output cable.
- MPU12B-104~108 are required to use AWG#20 / 6FT output cable.
- The regulation and efficiency will be changed by modified output cable.

Mechanical Specifications:(UK Type)

- Note:
1. Dimensions are shown in mm.
 2. Weight: 150gs approx.
 3. Optional output connector:
See page Appendix.

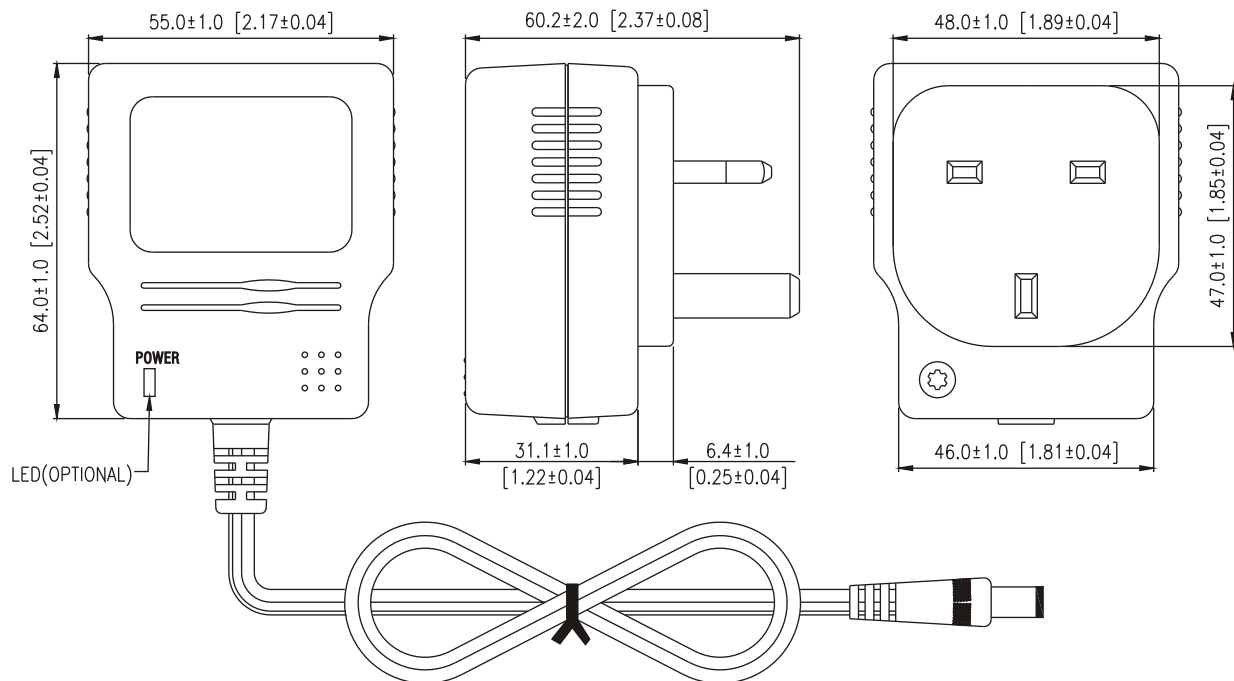

Stontronics Ltd

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH

Tel: +44 (0) 118 931 1199 - Fax: +44 (0) 118 931 1145 - Email: info@stontronics.co.uk - www.stontronics.co.uk

Stontronics Ltd is not responsible for typographical errors. Product specifications are subject to change without notice.