

## LA-PE Series Constant Current LED Driver PFC




### Features

- ◆ Constant current mode.
- ◆ Built-in active PFC function, PFC>0.9 at full loading.
- ◆ Installation:Independent.
- ◆ Universal AC input / Full range.
- ◆ Protections: Short circuit/Over current.

### Compliance

- ◆ Magnetic Emission EN55015.
- ◆ Harmonic EN61000-3-2.
- ◆ Immunity EN61547.
- ◆ Safety EN61347-1,EN61347-2-13

### Wire diagram:

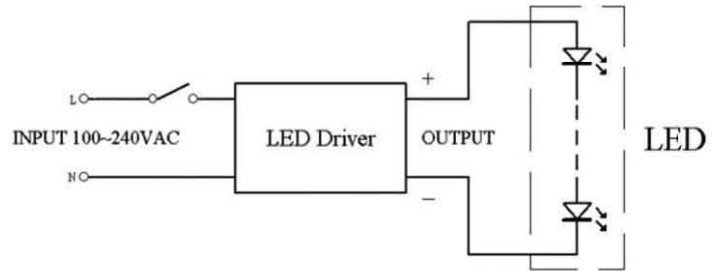

MODEL	INPUT	OUTPUT	RATED LOADING	PFC	EFFICIENCY (at full load)	DIMENSION (L×W×H)
LA6PE-350	100-240Vac 50/60Hz	3-24Vdc 350mA	1---6 LED	≥80%	≥76%	89×39×23 mm
LA6PE-700	100-240Vac 50/60Hz	2-12Vdc 700mA	1---3 LED	≥80%	≥70%	89×39×23 mm
LA12PE-350	100-240Vac 50/60Hz	16-36Vdc 350mA	5---10 LED	≥85%	≥82%	114 × 45×28 mm
LA12PE-700	100-240Vac 50/60Hz	8-18Vdc 700mA	3---5 LED	≥85%	≥80%	114 × 45×28 mm
LA20PE-350	100-240Vac 50/60Hz	30-70Vdc 350mA	9---18 LED	≥90%	≥85%	140×45×28 mm
LA20PE-700	100-240Vac 50/60Hz	12-35Vdc 700mA	4---9 LED	≥90%	≥82%	140×45×28 mm

### Stontronics Ltd

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH

Tel: +44 (0) 118 931 1199 - Fax: +44 (0) 118 931 1145 - Email: info@stontronics.co.uk - www.stontronics.co.uk

Stontronics Ltd is not responsible for typographical errors. Product specifications are subject to change without notice.