


Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- UL,cUL,GS,CB,CE,CCC,BSMI,FCC standard
- Meet EPS 2.0 LEVEL V



Dimension:

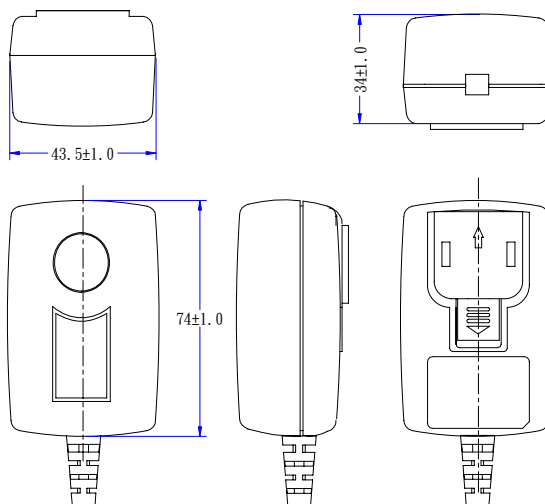

Model No.	Output		Watts
3A-401WP12	12V	3A	36W
3A-401WP19	19V	2.1A	39.9W
3A-401WP20	20V	2.0A	40W
3A-401WP24	24V	1.67A	40W

Specification:

Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	1A
	Leakage Current	< 0.25mA
Others	Start up time	< 2000mS @ Minimum AC input
	Rise time	< 20mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+75°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Converting)
M.T.B.F	50k Hours	
Safety	UL 60950-1,CSA C22.2 No.60950-1,EN60950-1,IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4

REV.02 2009.9.10

Stontronics Ltd

Chancerygate Business Centre, Cradock Road, Reading, Berks, RG2 0AH

Tel: 0118 931 1199 • Fax: 0118 931 1145 • E-mail: info@stontronics.co.uk • www.stontronics.co.uk

Stontronics Ltd is not responsible for typographical errors. Product specifications are subject to change without notice.