

IUU60 SERIES

63W U-bracket switching power supplies for Industrial Equipment

Description:


The IUU60 series of compact, open frame constructed, AC/DC or DC/DC switching mode power supplies provide 63 Watts of continuous output power . They are suited for use in industrial instrument and many other applications, all models are designed to meet the safety requirements of UL/c-UL(UL 60950-1),TUV-Bauart(EN60950-1) and new CE requirements. All units are 100% burned in and tested.

Features:

- Wide Input Voltage 81 to 280 VAC, 47 to 400 Hz or 90 to 420VDC
- Internal EMI filter
- Single to Quad Output
- Input connector mates with screw terminal (DINKLE#ESK750V-03P)(10-24AWG)
- Output connector mates with screw terminal (DINKLE#ESK750V-05P)(10-24AWG)
- Input Surge Current and Over Load protection
- Over Voltage Protection (Crowbar Design)
- Size: 3.2"x5"x1.38"
- Class I
- Power Fail Detect (Optional)
- Operating temperature -20~70°C
- 2 year warranty



Safety Approvals :



Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Input Voltage	Universal Input Voltage	90		264	VAC
			106		350	VDC
		Operating Voltage	81		280	VAC
			90		420	VDC
fin	Input Frequency		47		400	Hz
Po	Output Power Range	Vin= Operating Voltage	0		63	W
Vo	Output Voltage Range		See rating chart			V
Io	Output Current Range		See rating chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC or 160VDC			1.6	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC or 325VDC			0.8	A
Irl	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC or 160VDC		12	15	A
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC or 325VDC		26	30	A
Eff	Efficiency	Io=Full Load, Vin=230VAC or 325VDC	70	80	88	%
REG-i	Line Regulation	Io=Full Load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC or 325VDC		3	7	%
OVP	Over Voltage Protection		112		132	%
OCP	Over Current Protection		110		150	%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC or 140VDC			5	mS
Thold	Hold-Up Time	Io=Full Load, Vin=110VAC or 160VDC	16			mS
Ts	Start Up Time	Io=Full Load, Vin=100VAC or 140VDC	0.3	1	2	S
Vrn	Ripple & Noise (Peak to Peak)	Full Load, Vin=85VAC or 100VDC		0.5	1	%
Ilk	Safety Ground Leakage Current	Io=Full Load, Vin=240VAC		0.4	0.75	mA
TC	Temperature Coefficient	All output	-0.05		0.05	%/°C

* Note: The Ripple & Noise which is under 3.3VDC at 2% max

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		-20		70	°C
Tstg	Storage Temperature		-40		85	°C
Hr	Relative Humidity		5		95	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1			MHrs
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C					

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242			VDC
Vpg	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2121			VDC
Ris	Isolation Resistance	Test Voltage=500VDC	50			MΩ
CISPR	EMI requirements for CISPR-22	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-15	Vin=110VAC	B			CLASS

IUU60 SERIES


63W U-bracket switching power supplies for Industrial Equipment Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total Regulation	Maximum Output Power
IUU60-101	3 - 5 VDC	16.66 - 10.0 A	7%	50W
IUU60-102	5 - 6 VDC	11.0 - 9.16 A	7%	55W
IUU60-103	6 - 8 VDC	10.0 - 7.50 A	5%	60W
IUU60-104	8 - 11 VDC	7.87 - 5.72 A	5%	63W
IUU60-105	11 - 13 VDC	5.72 - 4.84 A	5%	63W
IUU60-105-1	11 - 13 VDC	4.00 - 3.46 A	5%	45W
IUU60-106	13 - 16 VDC	4.84 - 3.93 A	5%	63W
IUU60-107	16 - 21 VDC	3.93 - 3.00 A	5%	63W
IUU60-108	21 - 27 VDC	3.00 - 2.33 A	5%	63W
IUU60-109	27 - 33 VDC	2.33 - 1.90 A	5%	63W
IUU60-110	33 - 40 VDC	1.90 - 1.57 A	2%	63W
IUU60-111	40 - 48 VDC	1.57 - 1.31 A	2%	63W

Output Voltage And Current Rating Chart (Multi Output) :

Model Number	Output #1				Output #2				Output #3				Output #4				Maximum Output Power
	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	
IUU60-200	+3.3V	1.4A	7A	6%	+12V	0.6A	3A	5%									59.1W
IUU60-201	+5V	0.7A	7A	5%	+12V	0.3A	3A	5%									63W
IUU60-202	+5V	0.7A	7A	5%	+15V	0.3A	3A	5%									63W
IUU60-203	+5V	0.7A	7A	5%	+24V	0.4A	2A	5%									63W
IUU60-204	+3.3V	1.4A	7A	6%	+5V	0.5A	5A	5%									48.1W
IUU60-215	+5V	1.4A	7A	5%					-24V	0.2A	2A	5%					63W
IUU60-300	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					63W
IUU60-300-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					63W
IUU60-301	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-5V	0A	0.8A	5%					63W
IUU60-301-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+5V	0A	0.8A	5%					63W
IUU60-302	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					63W
IUU60-302-1	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					63W
IUU60-303	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%					63W
IUU60-303-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%					63W
IUU60-305	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	-12V	0A	0.8A	5%					63W
IUU60-305-1	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	+12V	0A	0.8A	5%					63W
IUU60-306	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-5V	0A	0.8A	5%					59.8W
IUU60-306-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+5V	0A	0.8A	5%					59.8W
IUU60-308	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	-12V	0A	1A	5%					53.5W
IUU60-308-1	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	+12V	0A	1A	5%					53.5W
IUU60-400	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
IUU60-400-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
IUU60-400-2	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
IUU60-400-3	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
IUU60-401	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
IUU60-401-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
IUU60-401-2	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
IUU60-401-3	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
IUU60-402	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-12V	0A	0.8A	5%	63W
IUU60-402-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+12V	0A	0.8A	5%	63W
IUU60-402-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-12V	0A	0.8A	5%	63W
IUU60-402-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+12V	0A	0.8A	5%	63W
IUU60-403	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-24V	0A	0.8A	5%	63W
IUU60-403-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+24V	0A	0.8A	5%	63W
IUU60-403-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-24V	0A	0.8A	5%	63W
IUU60-403-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+24V	0A	0.8A	5%	63W
IUU60-404	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
IUU60-404-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
IUU60-404-2	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
IUU60-404-3	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W

Mechanical Specifications :

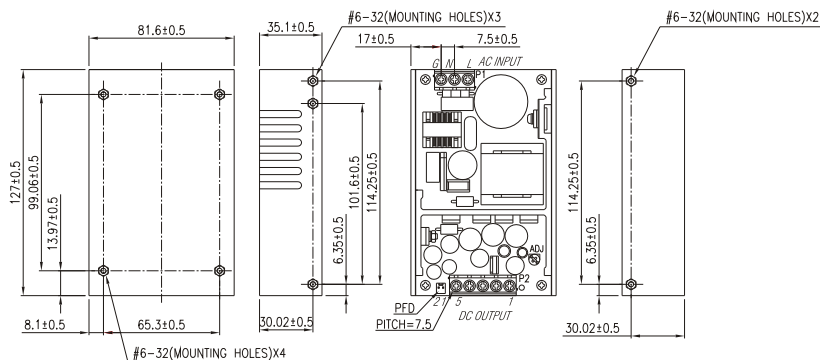

PIN CHART

PIN MODEL	PIN					PFD (Optional)	
	1	2	3	4	5	Other connector 1	Other connector 2
IUU60-1XX	OUT	OUT	RTN	RTN	RTN	OUT	RTN
IUU60-2XX	Vo2	Vo1	COM	N/C	N/C	OUT	RTN
IUU60-215	N/C	Vo1	COM	Vo3	N/C	OUT	RTN
IUU60-3XX	Vo2	Vo1	COM	Vo3	N/C	OUT	RTN
IUU60-4XX	Vo2	Vo1	COM	Vo3	Vo4	OUT	RTN

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3 Vo4:Output#4

Note:

- Dimensions are shown in inches or mm.
- Weight: 425gs approx.
- Input connector mates with screw terminal (DINKLE#ESK750V-03P)(10-24AWG).
- Output connector mates with screw terminal (DINKLE#ESK750V-05P)(10-24AWG).