




- Features :
- 2:1 wide input range
  - 1000VDC I/O isolation
  - 3000VDC I/O isolation
  - Input Pi network filter
  - Protections: Short circuit/ Over load
  - Free air convection
  - Six-sided shield metal case
  - High reliability/ Low cost
  - 100% burn-in test
  - 1 year warranty

**SPECIFICATION**

| ORDER NO.                   | SKA15A-033                              | SKA15B-033 | SKA15C-033 | SKA15A-05  | SKA15B-05 | SKA15C-05 | SKA15A-12    | SKA15B-12 | SKA15C-12 | SKA15A-15    | SKA15B-15 | SKA15C-15 |              |
|-----------------------------|---|------------|------------|--|-----------|-----------|--------------|-----------|-----------|--------------|-----------|-----------|--------------|
| <b>OUTPUT</b>               | <b>DC VOLTAGE</b>                       |            |            | 3.3V   |           |           | 5V           |           |           | 12V          |           |           | 15V          |
|                             | <b>CURRENT RANGE</b>                    |            |            | 300 ~ 3000mA   |           |           | 300 ~ 3000mA |           |           | 125 ~ 1250mA |           |           | 100 ~ 1000mA |
|                             | <b>RATED POWER</b>                      |            |            | 9.9W   |           |           | 15W          |           |           |              |           |           |              |
|                             | <b>RIPPLE &amp; NOISE (max.) Note.2</b> |            |            | 50mVp-p  |           |           | 50mVp-p      |           |           | 60mVp-p      |           |           | 60mVp-p      |
|                             | <b>LINE REGULATION Note.3</b>           |            |            | ±0.2%  |           |           |              |           |           |              |           |           |              |
|                             | <b>LOAD REGULATION Note.4</b>           |            |            | ±0.5%  |           |           |              |           |           |              |           |           |              |
|                             | <b>VOLTAGE ACCURACY</b>                 |            |            | ±2.0%  |           |           |              |           |           |              |           |           |              |
|                             | <b>SWITCHING FREQUENCY</b>              |            |            | 150KHz min.  |           |           |              |           |           |              |           |           |              |
| <b>INPUT</b>                | <b>VOLTAGE RANGE</b>                    |            |            | A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC   |           |           |              |           |           |              |           |           |              |
|                             | <b>EFFICIENCY (Typ.)</b>                |            |            | 76%  | 76%       | 76%       | 78%          | 78%       | 80%       | 82%          | 80%       | 82%       | 82%          |
|                             | <b>DC CURRENT</b>                       |            |            | Full load A: 1700mA B: 800mA C: 400mA  |           |           |              |           |           |              |           |           |              |
|                             |   |            |            | No load A: 20mA B: 30mA C: 15mA  |           |           |              |           |           |              |           |           |              |
| <b>PROTECTION (Note. 5)</b> | <b>OVER CURRENT</b>                     |            |            | 110% ~ 200% rated output power   |           |           |              |           |           |              |           |           |              |
|                             |   |            |            | Protection type : Hiccup mode, recovers automatically after fault condition is removed |           |           |              |           |           |              |           |           |              |
|                             | <b>SHORT CIRCUIT</b>                    |            |            | All output equipped with short circuit   |           |           |              |           |           |              |           |           |              |
| <b>ENVIRONMENT</b>          | <b>WORKING TEMP.</b>                    |            |            | -25 ~ +71°C (Refer to output load derating curve)                                      |           |           |              |           |           |              |           |           |              |
|                             | <b>WORKING HUMIDITY</b>                 |            |            | 20% ~ 90% RH non-condensing  |           |           |              |           |           |              |           |           |              |
|                             | <b>STORAGE TEMP., HUMIDITY</b>          |            |            | -25 ~ +105°C, 10 ~ 95% RH  |           |           |              |           |           |              |           |           |              |
|                             | <b>TEMP. COEFFICIENT</b>                |            |            | ±0.03% / °C (0 ~ 50°C)   |           |           |              |           |           |              |           |           |              |
|                             | <b>VIBRATION</b>                        |            |            | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes                |           |           |              |           |           |              |           |           |              |
| <b>SAFETY &amp; EMC</b>     | <b>WITHSTAND VOLTAGE</b>                |            |            | I/P-O/P: 1KVDC   |           |           |              |           |           |              |           |           |              |
|                             | <b>ISOLATION RESISTANCE</b>             |            |            | I/P-O/P: 100M Ohms / 500VDC  |           |           |              |           |           |              |           |           |              |
| <b>OTHERS</b>               | <b>MTBF</b>                             |            |            | 300khrs min. MIL-HDBK-217F(25°C)   |           |           |              |           |           |              |           |           |              |
|                             | <b>DIMENSION</b>                        |            |            | 50.8*25.4*11.27 mm or 2**1**0.44" inch (L*W*H)   |           |           |              |           |           |              |           |           |              |
|                             | <b>WEIGHT</b>                           |            |            | 60g  |           |           |              |           |           |              |           |           |              |

■ Mechanical Specification


Unit:mm(inch)

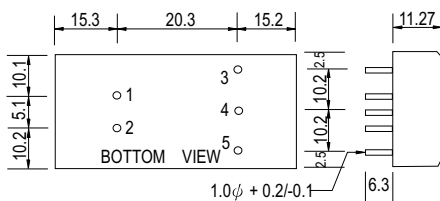

■ Pin Configuration

| Pin no. | Output Single |
|---------|---------------|
| 1       | +Vin          |
| 2       | -Vin          |
| 3       | +Vout         |
| 4       | No Pin        |
| 5       | -Vout         |

■ Derating Curve

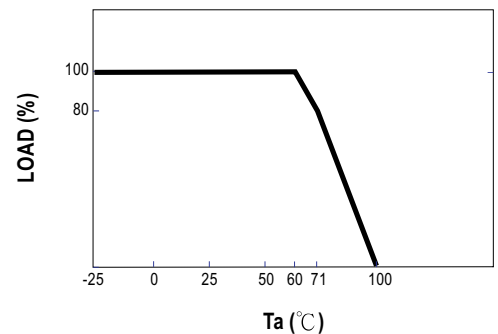

**NOTE**

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH. Ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 10% to 100% rated load.
- 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.