


12Vdc Economical Multi-Output PSU with a 2 Year Warranty

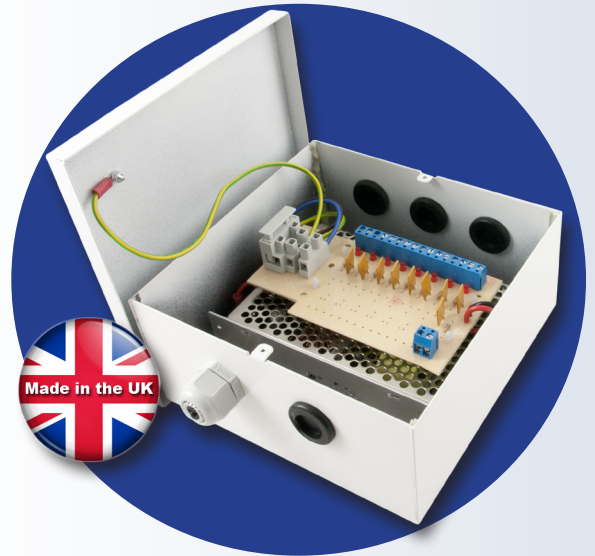

Features:

- Competitively priced
- High Quality & Reliability
- European Input voltage (200-240VAC)
- Class I Switch Mode Power Supply
- Small Footprint & Integrated Mounting Holes for easy installation.
- Short manufacturing lead times
- Metal box with detachable lid to enclose all components and discreetly keep from view to help avoid risk of electric shock.
- Suitable for CCTV & Security applications
- CE & RoHS Compliant
- Assembled in the UK
- 2 Year Warranty

*Image Disclaimer:
Unit pictured is a T4905AD and is for illustration purposes only.*



Electrical Specifications:

Part Number	T4900AD	T4901AD	T4902AD	T4903AD	T4904AD	T4905AD	T4906AD	T4907AD	T4908AD	T4909AD	T4910AD	T4911AD
Voltage	12Vdc	12Vdc	12Vdc	12Vdc	12Vdc	12Vdc	12Vdc	12Vdc	12Vdc	12Vdc	12Vdc	12Vdc
No. of Outputs	4-way	4-way	4-way	9-way	9-way	9-way	9-way	9-way	18-way	18-way	18-way	18-way
Fuse Protection	PTC - units fitted with a 1.1A or 1.85A fuse (specified in installation manual)											
Max. Total Current Rating	2.1A	4.2A	5A	4.2A	5A	8.5A	12.5A	16.5A	8.5A	12.5A	16.5A	25A
Current Min.	0 Amp (Unit Total)											
Power Rating	25Watt	50Watt	60Watt	50Watt	60Watt	102Watt	150Watt	200Watt	102Watt	150Watt	200Watt	300Watt
Voltage Adjustment	+/- 10% via built-in voltage trimmer (manual adjustment up to 13.2Vdc)											
Line Regulation	+/- 0.5%											
Load Regulation	+/- 2%											
Input												
Voltage Range	176~264VAC											
Frequency	47~63Hz											
In-Rush Current	50A (220VAC)											
Input Current	1.2A Max.											
Leakage Current	Input-Output: 0.25A (no load)											
Efficiency	80% (typical)											
More												
Protections	Over Power, Over Current, Over Voltage & Short Circuit											
Operating Temp.	0 - 40°C											
Operating Hum.	20 - 90% RH No Condensing											
MTBF	>100K Hours											
PSU Approvals	Safety: EN/UL60950 EMC: EN55022 Class B & EN6100-4 (-2/-3/-4/-5/-6/-11)											
Dimensions	165 x 165 x 80 (max.) (L x W x H)						270 x 160 x 80 (max.) (L x W x H)					
Weight	from approx. 1Kg						from approx. 1.5Kg					