

15W Desk Top Switching Power Supplies For Medical Equipment.

Description:

The MPU15B series of AC/DC switching mode power supplies provide 15 Watts of continuous output power and is well-suited for a variety of applications. All supplies are UL 94V-1 min compliant. All models comply with UL/c-UL (UL 60601-1:2nd Edition), TUV/T-mark (EN 60601-1:2nd Edition) and new CE requirements. All units are 100% burned-in and tested.

Features:

- Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- IEC-320-C8 Input Inlet
- Single Output
- Energy Star 2.0, Efficiency level V
- Over Voltage and Over Load protection.
- Over temperature Detection
- Class II
- 3 year warranty



Safety Approvals:



Agree to apply for the PSE if order on hand

Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Safety Approvals Input Voltage Range		100		240	VAC
	Operate Voltage Range		90		264	VAC
fin	Input Frequency		47		63	Hz
Po	Output Power Range	Vin=90 to 264VAC	0		15	W
Vo	Output Voltage Range		See rating chart			V
Io	Output Current Range		See rating chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC		0.25	0.33	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC		0.17	0.18	A
Irl	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		18	23	A
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC		38	45	A
Eff	Efficiency	Io=Full Load, Vin=230VAC	73		85	%
REG-i	Line Regulation	Io=Full Load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC	1	3	5	%
OVP	Over Voltage ^① Protection		112		132	%
OCP	Over Current ^① Protection		110		150	%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC			4	mS
Thold	Hold-Up Time	Io=Full Load, Vin=110VAC	10	16		mS
Ts	Start Up Time	Io=Full Load, Vin=100VAC		0.5	1	S
Vp-p	Ripple & Noise (Peak to Peak)	Full Load, Vin=90VAC		0.5	1	%
TC	Temperature Coefficient	All output	-0.04		0.04	%/°C
Pno	No-Load Power Consumption	No load, Vin=230VAC	0	0.25	0.3	W
Tjstd	Thermal Shutdown ^① by Junction Temperature Controller	The parameter is not subject to production test-verified by design/characterization of integrated controller.	-20		125	°C

① When the power system interruption is isolated, the product would re-start after recovering by hand.

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		0	50	70	°C
Tstg	Storage Temperature		-40		85	°C
Ho	Operating Humidity		0		95	%
Hr	Storage Humidity		0		75	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1M			Hrs
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C					

15W Desk Top Switching Power Supplies For Medical Equipment.

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	5656			VDC
EN55022	EMI requirements for EN55022	Vin=230VAC, 50HZ	B			CLASS
FCC	EMI requirements for FCC PART-18	Vin=120VAC, 60HZ	B			CLASS

Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total ^① Regulation	Maximum Output Power
* MPU15B-102	5 ~ 6 VDC	2.60~2.16 A	5%	13W
* MPU15B-103	6 ~ 8 VDC	2.16~1.62 A	5%	13W
* MPU15B-104	8 ~ 11 VDC	1.87~1.36 A	5%	15W
* MPU15B-105	11 ~ 13 VDC	1.36~1.15 A	5%	15W
MPU15B-106	13 ~ 16 VDC	1.15~0.93 A	5%	15W
MPU15B-107	16 ~ 21 VDC	0.93~0.71 A	5%	15W
MPU15B-108	21 ~ 27 VDC	0.71~0.55 A	3%	15W
MPU15B-109	27 ~ 33 VDC	0.55~0.45 A	3%	15W
MPU15B-110	33 ~ 36 VDC	0.45~0.41 A	3%	15W


Mark "*" means "PSE approval"

① MPU15B-102.103 are required to use AWG#16 / 4FT output cable.

MPU15B-105~110 are required to use AWG#18 / 4FT output cable.

The regulation and efficiency will be changed by modified output cable.

Mechanical Specifications :

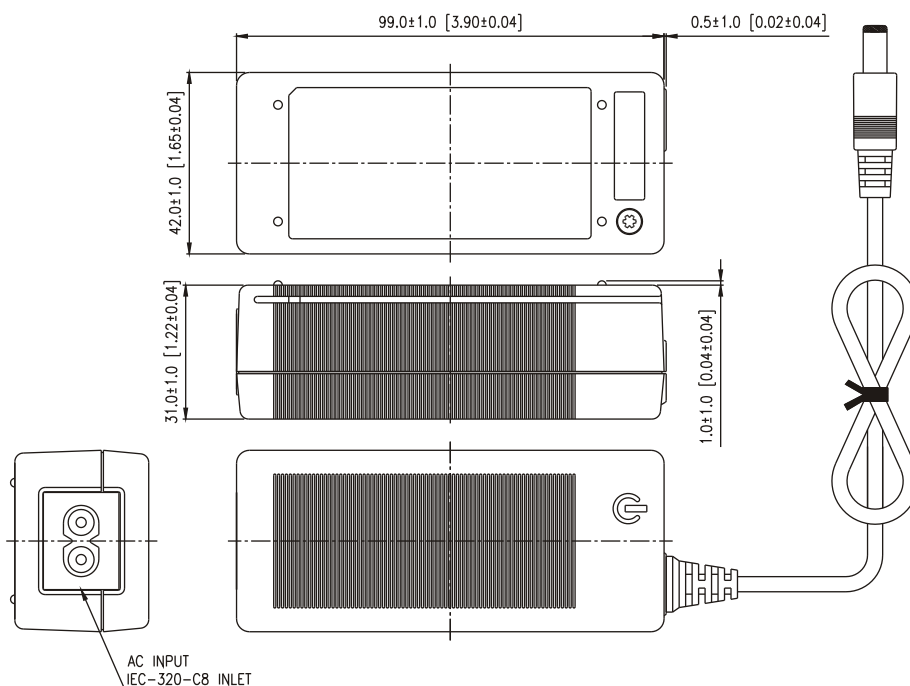

Note:

1. Dimensions are shown in mm.
2. Weight: 170gs approx.
3. Optional output connector: See page Appendix.

Stontronics Ltd

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH

Tel: +44 (0) 118 931 1199 - Fax: +44 (0) 118 931 1145 - Email: info@stontronics.co.uk - www.stontronics.co.uk

Stontronics Ltd is not responsible for typographical errors. Product specifications are subject to change without notice.