

LA-Y Series Constant Current LED Driver IP67 PFC




Features

- ◆ Constant current mode.
- ◆ Installation: Independent.
- ◆ Universal AC input / Full range.
- ◆ Protections: Short circuit/Over current

Compliance

- ◆ Magnetic Emission EN55015.
- ◆ Harmonic EN61000-3-2.
- ◆ Immunity EN61547.
- ◆ Safety EN61347-1, EN61347-2-13.

Wire diagram:

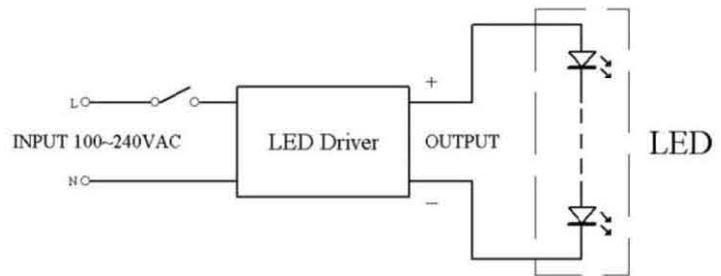

MODEL	INPUT	OUTPUT	RATED LOADING	PFC	EFFICIENCY (at full load)	DIMENSION (D×H)
LA12Y-350	100-240Vac 50/60Hz	9-32Vdc 350mA	3---9 LED	≥85%	≥78%	Φ64×30mm
LA12Y-700	100-240Vac 50/60Hz	3-16Vdc 700mA	1---4 LED	≥85%	≥72%	Φ64×30mm
LA20Y-350	100-240Vac 50/60Hz	9-48Vdc 350mA	3---13 LED	≥85%	≥82%	Φ78×30mm
LA20Y-700	100-240Vac 50/60Hz	3-28Vdc 700mA	1---8 LED	≥85%	≥78%	Φ78×30mm
LA35Y-350	100-240Vac 50/60Hz	40-80Vdc 350mA	12---22 LED	≥90%	≥86%	Φ96×32mm
LA35Y-700	100-240Vac 50/60Hz	24-48Vdc 700mA	7---13 LED	≥90%	≥86%	Φ96×32mm
LA35Y-1050	100-240Vac 50/60Hz	15-30Vdc 1050mA	5---8 LED	≥90%	≥85%	Φ96×32mm
LA35Y-1400	100-240Vac 50/60Hz	12-24Vdc 1400mA	4---6 LED	≥90%	≥85%	Φ96×32mm

Stontronics Ltd

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH

Tel: +44 (0) 118 931 1199 - Fax: +44 (0) 118 931 1145 - Email: info@stontronics.co.uk - www.stontronics.co.uk

Stontronics Ltd is not responsible for typographical errors. Product specifications are subject to change without notice.