

LA Series Constant Current LED Driver IP67




Features

- ◆ Constant current mode.
- ◆ Installation: Independent.
- ◆ Universal AC input / Full range.
- ◆ Fully encapsulated with IP67 level.
- ◆ Protections: Short circuit/Over current.

Compliance

- ◆ Magnetic Emission EN55015.
- ◆ Harmonic EN61000-3-2.
- ◆ Immunity EN61547.
- ◆ Safety EN61347-1, EN61347-2-13

Wire diagram:

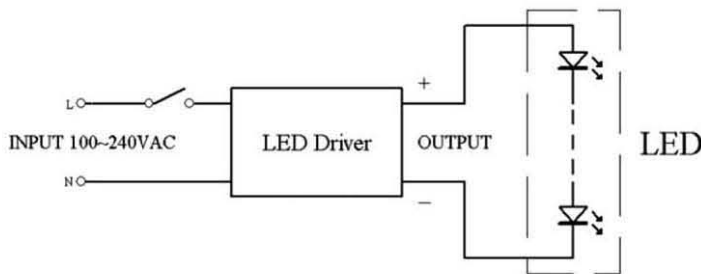

| MODEL | INPUT | OUTPUT | RATED LOADING | EFFICIENCY (at full load) | DIMENSION (L×W×H) |
|-----------|------------|-----------------|---------------|---------------------------|-------------------|
| LA5-350 | 100-240Vac | 2-12Vdc 350mA | 1---3 LED | ≥60% | 58×28×22mm |
| LA5-700 | 100-240Vac | 2-7Vdc 700mA | 1---2 LED | ≥62% | 58×28×22mm |
| LA9-350 | 100-240Vac | 3-24Vdc 350mA | 1---6 LED | ≥72% | 130×25×21mm |
| LA9-700 | 100-240Vac | 2-12Vdc 700mA | 1---3 LED | ≥72% | 130×25×21mm |
| LA20-350 | 100-240Vac | 9-48Vdc 350mA | 3---13 LED | ≥82% | 140×30×20mm |
| LA20-700 | 100-240Vac | 3-28Vdc 700mA | 1---8 LED | ≥82% | 140×30×20mm |
| LA35-350 | 100-240Vac | 30-80Vdc 350mA | 9---22 LED | ≥85% | 148×32×26mm |
| LA35-700 | 100-240Vac | 9-48Vdc 700mA | 3---13 LED | ≥85% | 148×32×26mm |
| LA35-1050 | 100-240Vac | 9-30Vdc 1050mA | 3---8 LED | ≥85% | 148×32×26mm |
| LA35-1400 | 100-240Vac | 9-24Vdc 1400mA | 3---6 LED | ≥85% | 148×32×26mm |
| LA50-700 | 100-240Vac | 30-72Vdc 700mA | 9---20 LED | ≥86% | 148×40×30mm |
| LA50-1050 | 100-240Vac | 9-48Vdc 1050mA | 3---13 LED | ≥86% | 148×40×30mm |
| LA50-1400 | 100-240Vac | 9-36Vdc 1400mA | 3---10 LED | ≥86% | 148×40×30mm |
| LA60-1050 | 100-240Vac | 12-60Vdc 1050mA | 4---16 LED | ≥87% | 162×42.5×30mm |
| LA60-1400 | 100-240Vac | 9-42Vdc 1400mA | 3---12 LED | ≥87% | 162×42.5×30mm |
| LA60-1750 | 100-240Vac | 9-36Vdc 1750mA | 3---10 LED | ≥87% | 162×42.5×30mm |

Stontronics Ltd

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH

Tel: +44 (0) 118 931 1199 - Fax: +44 (0) 118 931 1145 - Email: info@stontronics.co.uk - www.stontronics.co.uk

Stontronics Ltd is not responsible for typographical errors. Product specifications are subject to change without notice.